

**ADDENDUM NO. 2
TO THE
BIDDING DOCUMENTS
FOR
MILL CREEK WRF ELECTRICAL AND PROCESS IMPROVEMENTS
FOR
LAKE COUNTY PUBLIC WORKS**

LAKE COUNTY BID NO. 17223

DATE: January 5, 2018

BID CLOSING DATE & TIME:

2:00 PM local time, January 16, 2018

TO ALL BIDDERS BIDDING ON THE ABOVE PROJECT:

All Bidders submitting a Bid on the above Contract shall carefully read this Addendum and give it consideration in the preparation of their Bid.

I. The following are revisions to the Specifications:

- A. Table of Contents, page 1, delete the line "Section 01 21 00 – Allowances....01 21 00-1"
- B. Table of Contents, page 3, delete the line "Section 44 42 82 – Clarifier Rehabilitation....44 42 82-1 to 44 42 82-4"
- C. Supplementary Conditions, page SC-7, Add the following paragraph to Article SC 6.08:

"Add the following new paragraph immediately after paragraph 6.08.A.:

Contractor is responsible for all fees associated with the Village of Old Mill Creek Building Permit. Fees are based on base fees and valuation of project. Engineer's estimate of these Building Permit fees is \$35,000."
- D. Delete Section 01 21 00 ALLOWANCES in its entirety. This work is being removed from the Bid.
- E. Page 40 61 96-10, Delete paragraph 2.04.E.8 and replace with the following:

"8. Local control station will have a push-pull maintained-contact pushbutton that when depressed will trigger an emergency stop and inhibit pump operation in all control modes. E-stop condition will only be removed by pulling out the E-Stop pushbutton and then pressing the E-stop Reset pushbutton at the local control station."
- F. Page 40 71 00-2, Add the following sub-paragraph immediately following Article 2.01.C.1.:

"a. Flow conditioners will be required on air flow meters 030-FE/FIT-3-4-1, 030-FE/FIT-3-4-2, 030-FE/FIT-3-4-3, and 030-FE/FIT-3-4-4."
- G. Delete Section 44 42 82 CLARIFIER REHABILITATION in its entirety. This work is being removed from the Bid.

II. The following are revisions to the Drawings:


- A. Sheet No. 3 (001-G-2): Remove 040 – CLARIFIERS from the Index to Drawings.
- B. Sheet No. 13 (007-E-4): Place plan note number six (6) adjacent to the two Mixer motors and two IMLR Pumps. Typical of four (4) locations.
- C. Sheet No. 28 (030-SM-5): Add plan note number four (4) to Plan Note list on right side of sheet:

“4. Provide flanges for flow meter flow conditioner installations. Locate flow conditioners based on flowmeter manufacturer’s recommendations.”
- D. Sheet No. 28 (030-SM-5): Place plan note number four (4) adjacent to the four flowmeter tags (030-FE/FIT-3-4-1, 030-FE/FIT-3-4-2, 030-FE/FIT-3-4-3, and 030-FE/FIT-3-4-4). Typical of four (4) locations.
- E. Sheet No. 36 (040-M-1): Remove this Drawing in its entirety. This work is being removed from the Bid.

III. Any revisions to any of the Contract Documents made by this Addendum shall be considered as the same revision to any and all related areas of the Contract Documents not specifically called out in this Addendum.

IV. The Bidder shall acknowledge receipt of this Addendum by filling out and including the Addendum Acknowledgement form, located in the Bid Specifications, as an attachment to the Bid.

DONOHUE & ASSOCIATES, INC.

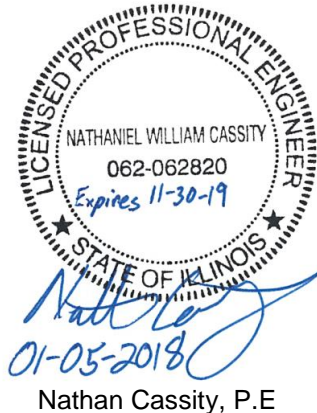

END OF ADDENDUM #2