

Bid No. 19183

Addendum #2

Addendum #2 covers the adjustments made to the location of the fence-line, gate, and the expectations for the creek crossing since Addendum #1 was released.

There is an underground sewer line that runs parallel approx. 10ft. in from the roadway. Additional brush was cleared by Lake County Public Works in order to push the fence-line in further south to avoid installation over the sewer line. The fence-line and sewer-line have been staked out for the installer to follow. Lake County Public Works will be responsible for keeping everything marked until work can be started in the Spring.

Lake County Public Works will be responsible for removing stumps that are in the way of the fence installation. Any additional brush removal deemed necessary by the contractor will be handled by Lake County Public Works. Contractor will notify and allow ample time to complete the removal.

Please see Addendum #2 1-A drawing.


Please note the gate for the utility vehicles to pass through needs to be installed diagonal to the existing East fence. In order to avoid gate installation over the sewer line, there should be a 10ft. panel that is attached to the post connecting to the existing East fence. The gate should connect to this panels. See Addendum #2 1-A drawing.

Creek Crossing

There seem to be many solutions for fencing over the creek crossing. Lake County Public Works will allow the installer to determine the best option for crossing or spanning the area. The contractor shall specify in the bid their option for lake County to review and accept.

Note: Lake County Public Works has offered the suggestion of installing a solid gate panel over the creek. There is another location of fence spanning over a waterway on site that is attached as Addendum #2 Creek Crossing Example 1C.

Addendum #2 1-A

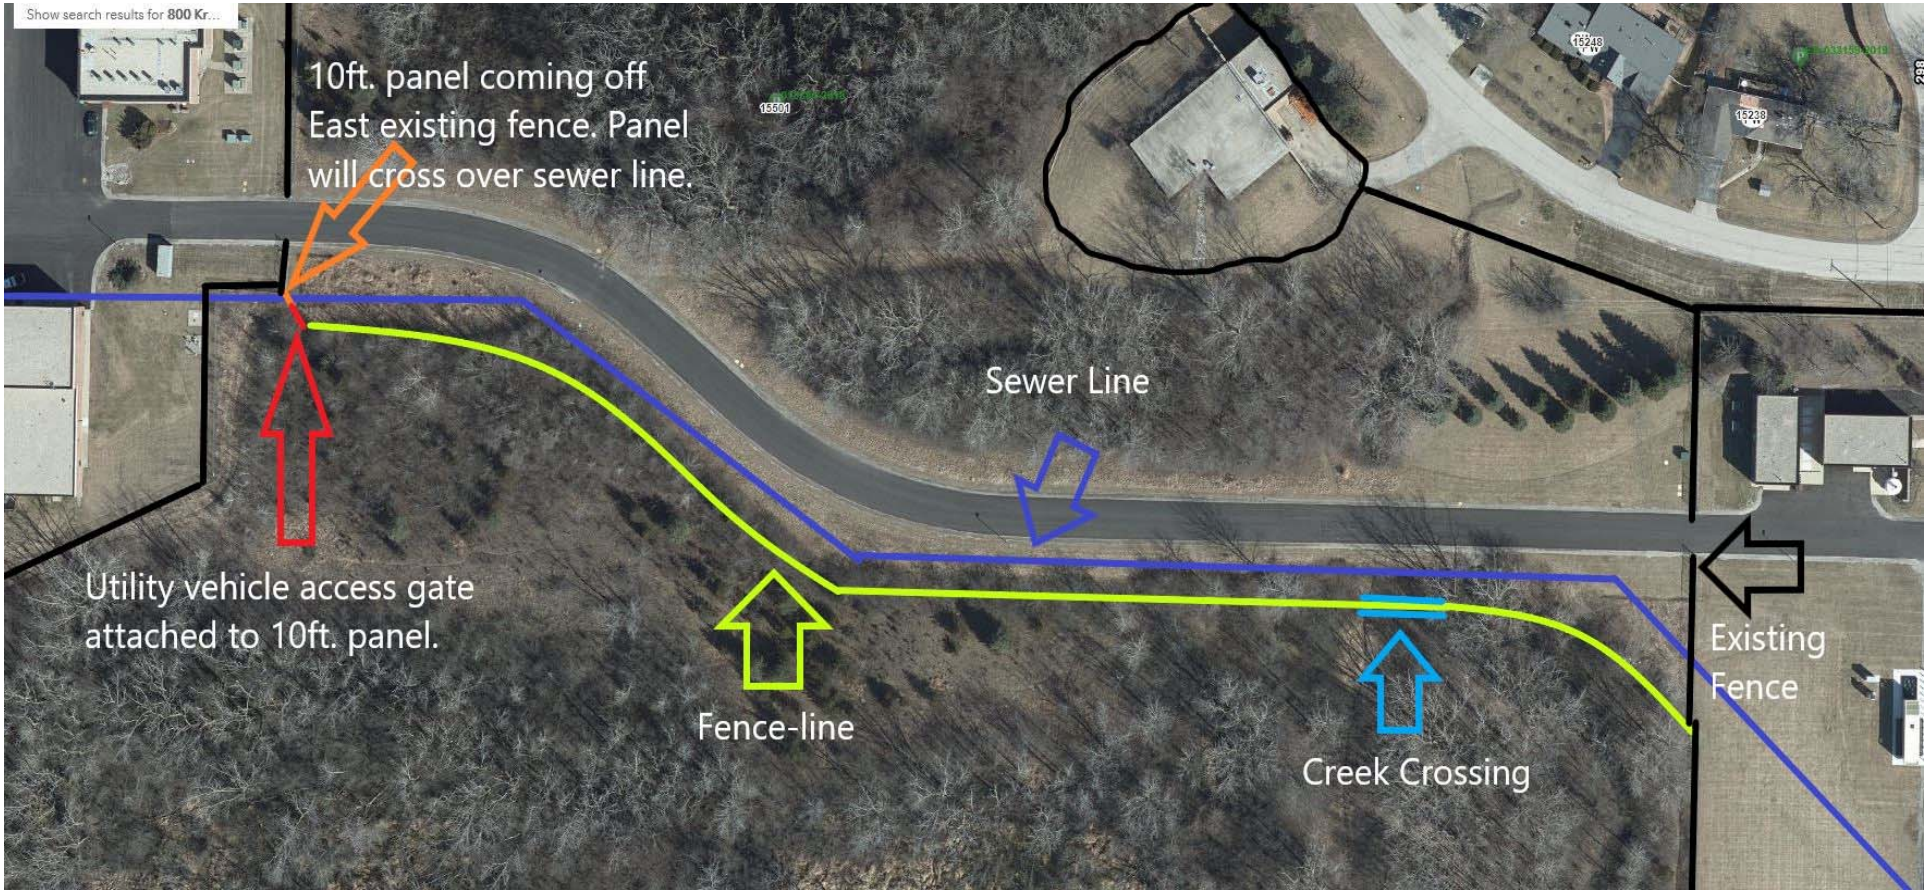

ADDENDUM #2 CREEK CROSSING EXAMPLE 1-C

